

FIG.1
(CONVENTIONAL ART)

2/15


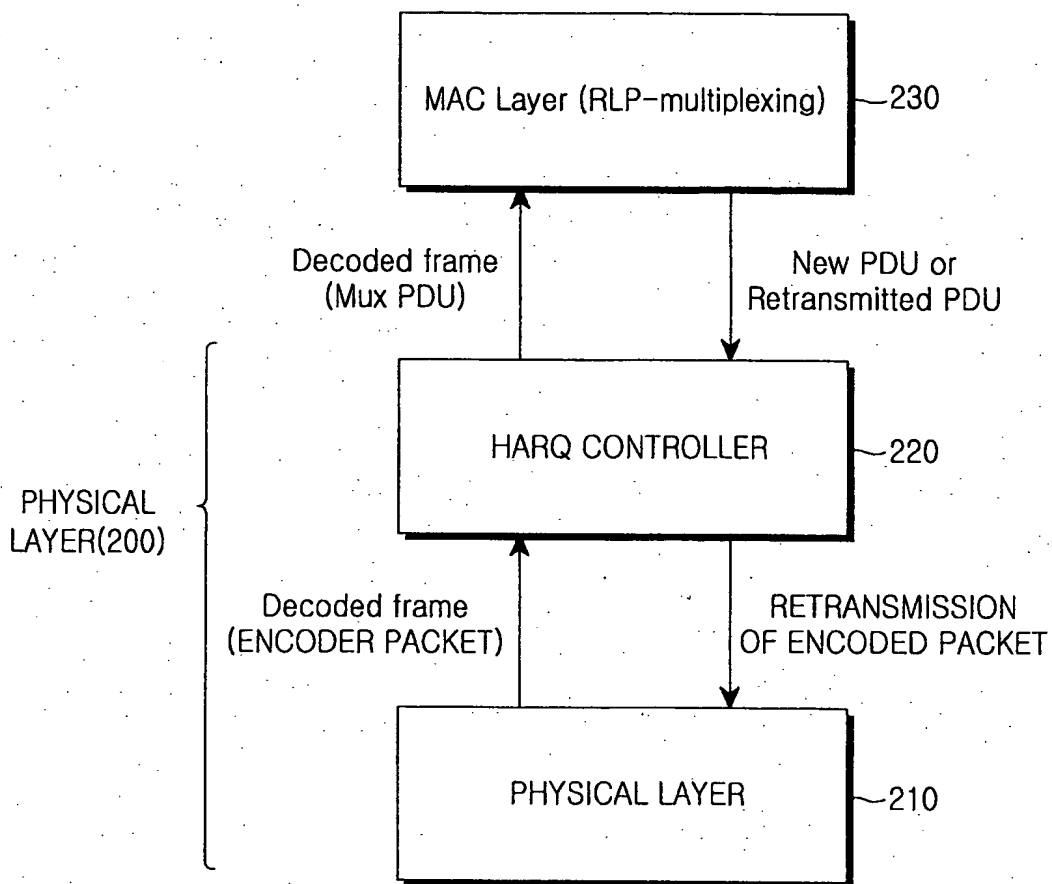



FIG.2
(RELATED ART)

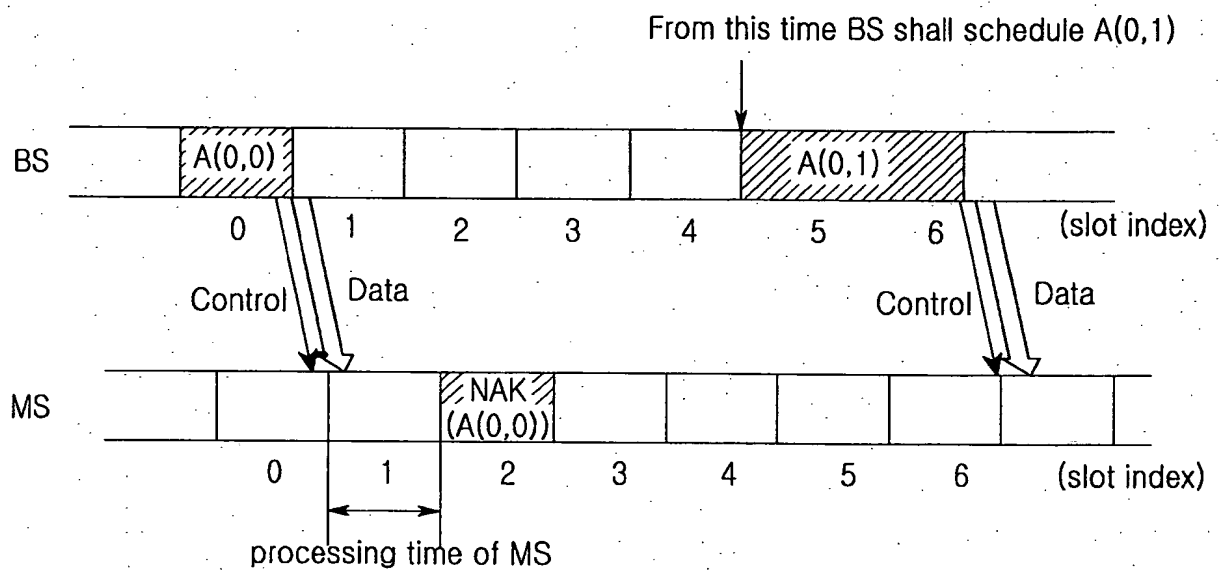

$A(x,y)$ =Mobile station 'A'
ARQ instance(ACID)'x'
Subpacket ID(SPID)'y'

FIG.3
(CONVENTIONAL ART)

4/15

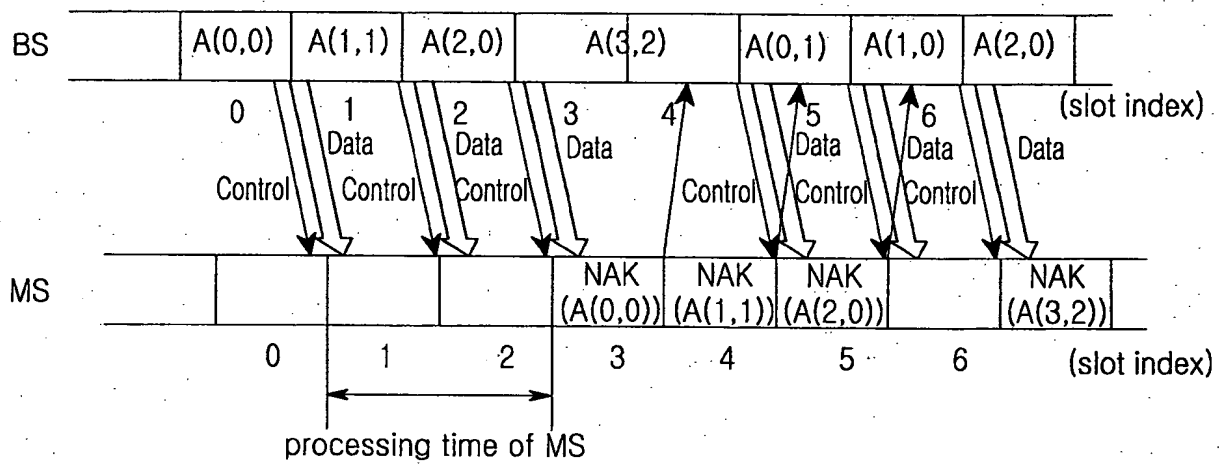

A(x,y)=Mobile station 'A'
ARQ instance(ACID)'x'
Subpacket ID(SPID)'y'

FIG.4
(CONVENTIONAL ART)